


MKA-07101

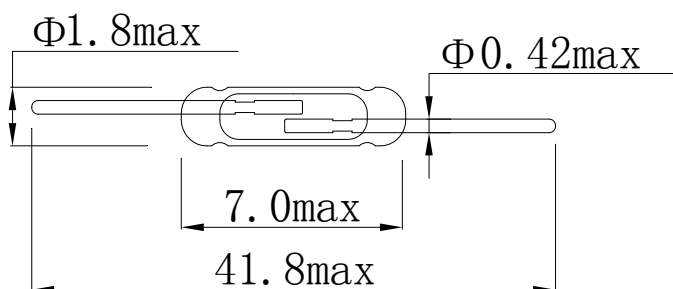

Contact form	1A
Contact material	Ru
Switching power	1 W (max.)
Switching voltage	24V(max.)
Switching current	0.1 A (max.)
Pull in	7 – 35 AT
Drop out	4 AT min.
contact resistance	0.2 $\Omega$ max.
Breakdown voltage,	150VDC min.
Insulation resistance	10 <sup>9</sup> $\Omega$ min.
Operate time	0.3ms max.
Release time	0.1 ms max.
Capacitance	0.4 pF max.
Resonant frequency, Hz min.	12000
Operate temperature range	- 60 to + 125 $^{\circ}$ C
High humidity at T=35 $^{\circ}$ C	98% max.
Operation frequency, Hz max.	400
Test coil:	
Number of turns	5000
Resistance, Ohm	580
UL file#	E229065